

WIRE WRAPPED WELLSCREEN

Our wire wrapped wellscreens are manufactured in diameters from 60 mm to 1000 mm, with individual screen lengths of up to 12 metres.



Each screen is manufactured using trapezoidal/triangular section profile wire, spirally wrapped around longitudinal support rods.

Wire wrapped wellscreens are particularly suited to fine-grained and slimy soils, where a very small slot opening is required to prevent the passage of fine particles while allowing efficient water flow.

Screens and casing can be manufactured to customer requirements, with threaded or flanged connections available to suit the application.

Wellscreens are available in a range of stainless steel grades, including 304 and 316, as well as other weldable metals.

Lead time is up to 10 weeks.

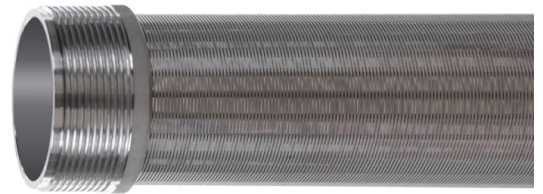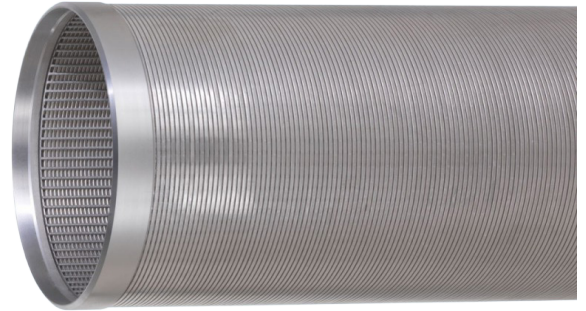

Nominal Diameter		Outside Diameter	Wall Thickness	Inside Diameter	Outside Diameter Over Connection
mm	inch	mm	mm	mm	mm
35	1 ¼	42	3.5	33	46
50	2	60	4	50	65
80	3	88	4	78	93
100	4	113	5	101	119
115	4 ½	125	5	113	131
125	5	140	6.5	125	149
150	6	165	5.7	152	172
175	7	200	7.0	184	210
200	8	225	7.6	207	236